


# GEFITAS<sup>®</sup> ALU 1500 RS

## Our new eco-friendly sealing membrane for ground contact floor slabs and screed constructions


The Gefitas Alu 1500 RS is a flexible, bitumen-free aluminum composite sealing membrane for screed constructions. It serves as a moisture and vapor barrier and meets the requirements of DIN EN 13967. The membrane is equipped with double-sided adhesive tape and can also be used as a masonry barrier in accordance with DIN EN 14909. It protects ground contact concrete and wall bases from ground moisture and splash water according to DIN 18533 Parts 1 and 2.


### Advantages:

- Vapor-proof (**SD-value:  $\geq 1.500$  m**) + emission-free
- **Radon-proof**
- Processing temperature  $-5$  °C to  $+35$  °C
- Bitumen/PVC free
- Heat-reflective
- Tear-resistant
- Soft and flexible
- Lightweight
- Quick to install with a width of 1.5 m
- Part of the Gefitas system family 

**NOW  
AVAILABLE AT  
GEFINEX**

Information &  
Downloads

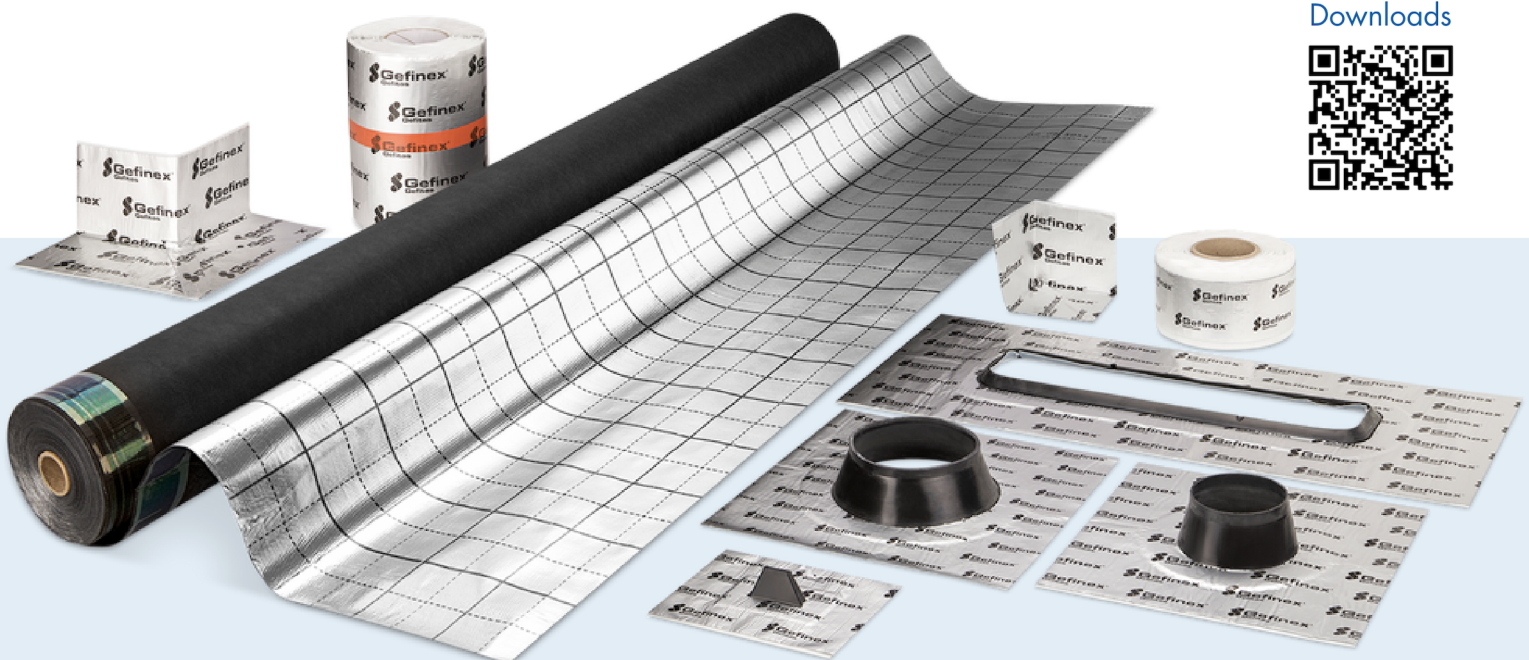

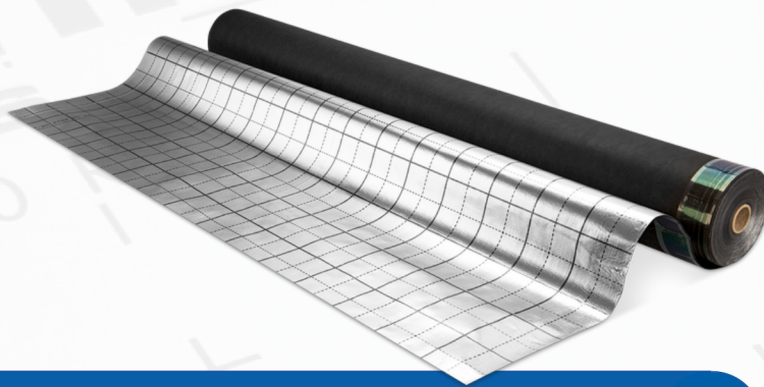

## Gefitas® Alu 1500 RS

Art.-No.: 715902

PU: 1 roll

1 PAL: 28 rolls

Length: 50 m

Width: 1.500 mm

Surface: 75 m<sup>2</sup>



## ACCESSORIES

### Radon-proof Pipe Sleeve RGD 100

Art.-No.: 715872

PU: 1 pc.

- for pipe diameter 100 - 110 mm
- with sealing grommet made of special elastomer for effective radon protection
- 320 x 320 mm aluminum butyl adhesive collar



### Radon-proof Pipe Sleeve RGD 150

Art.-No.: 715873

PU: 1 pc.

- for pipe diameter 150 - 165 mm
- with sealing grommet made of special elastomer for effective radon protection
- 350 x 350 mm aluminum butyl adhesive collar



### Radon-proof Grounding Strap Sleeve

Art.-No.: 715874

PU: 1 pc.

- for 4 x 30 mm grounding strap
- with sealing grommet made of special elastomer for effective radon protection
- 200 x 150 mm aluminum butyl adhesive collar



### Radon-proof Multi-Passage Seal

Art.-No.: 715890

PU: 1 pc.

- Diameter 96 x 461 mm (MSH Basic FUBO SR4)
- with sealing grommet made of special elastomer for effective radon protection
- Adhesive collar: 750 x 320 mm with radon-proof aluminum butyl foil



### Radon-proof Self-Adhesive Internal Corner

Art.-No.: 715875

PU: 4 pcs.

- 115 x 115 x 115 mm
- made of radon-proof aluminum butyl foil
- with divided adhesive surfaces for comfortable application




### Radon-proof Self-Adhesive External Corner

Art.-No.: 715876

PU: 4 pcs.

- 115 x 300 x 300 mm
- made of radon-proof aluminum butyl foil
- with divided adhesive surfaces for comfortable application



### Radon-proof Connection Tape 230 mm

Art.-No.: 715877

PU: 1 roll. / 15 m

- 230 x 15.000 mm
- made of radon-proof aluminum butyl foil
- adhesive surface slit in the middle



### Radon-proof Connection Tape 75 mm

Art.-No.: 715892

PU: 1 roll. / 15 m

- 75 x 15.000 mm
- made of radon-proof aluminum butyl foil
- adhesive surface slit in the middle

